

Series 4034

- Switching test probe "Opener" (NC) type
- Contacting of individual test points
- Contacting without adapter possible
- For use in function test

Mechanical Data

Center	4.00 mm/160 mil
Temperature Range	-30 °C - +120 °C
Full Travel	10.00 mm
Working Travel	5.00 mm
Switching Travel	6.00 mm
Spring Force at Working Travel	1.60 N
Spring Force at Switching Travel	1.50 N
Operating Pressure	6 bar
Operating Medium	Compressed Air (filtered, oil-free)

Electrical Data

Receptacle-Probe Tip	
Max. Current Rating	3.0 A
Typical Continuity Resistance	<= 30 mOhm
Tube Connection-Probe Tip	
Max. Current Rating	1.0 A
Typical Continuity Resistance	<= 50 mOhm




Materials

Barrel	Brass, gold-plated
Spring	Spring Steel, gold-plated
Plunger	Steel
Receptacle	Brass, gold-plated

Recommended Diameter of Drill


HP 2361.1 (Trolitax)	3.40 mm
HGW 2372	3.41 mm

Tip style - Diameter - Plating




A	BST1	G
3.00 Rh	2.00 Rh	1.30 Rh


4034

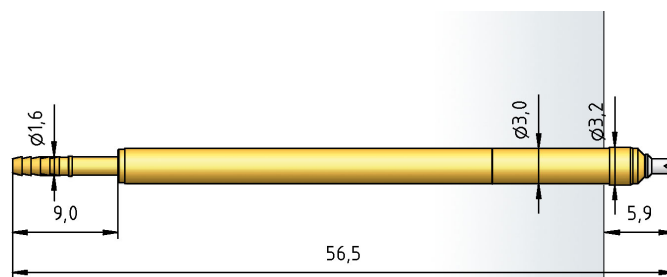

H 4004

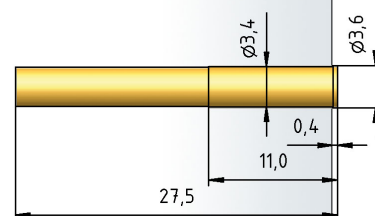

L 4000



How to Order

4034	-	G	-	1.6 N	-	Rh	-	1.3	-	L
1	2	3	4	5	6					

1. Series 2. Tip Style 3. Spring Force
4. Tip Plating 5. Tip Diameter 6. For Connection of L 4000