

Series 1008/D

- Use in cases of bad soiling, oxydation or flux residues
- Penetration of these platings by rotating movement


Mechanical Data	
Center	1.27 mm/50 mil
Temperature Range	-30 °C - +120 °C
Full Travel	6.40 mm
Working Travel	4.30 mm
Pre-loaded Spring Force	1.00 N
Spring Force at Working Travel	1.50 N

Electrical Data	
Max. Current Rating	2.0...3.0 A
Typical Continuity Resistance	<= 20 mOhm


Materials	
Barrel	Bronze, gold-plated
Spring	Spring Steel, gold-plated
Plunger	Steel, gold-plated
Receptacle	Bronze, gold-plated

Recommended Diameter of Drill	
HP 2361.1 (Trolitax)	0.96...0.98 mm
with pressed-in Ring	1.02 mm
HGW 2372	0.97...0.99 mm
with pressed-in Ring	1.03 mm

Tip style - Diameter - Plating



HD
0.90 Au

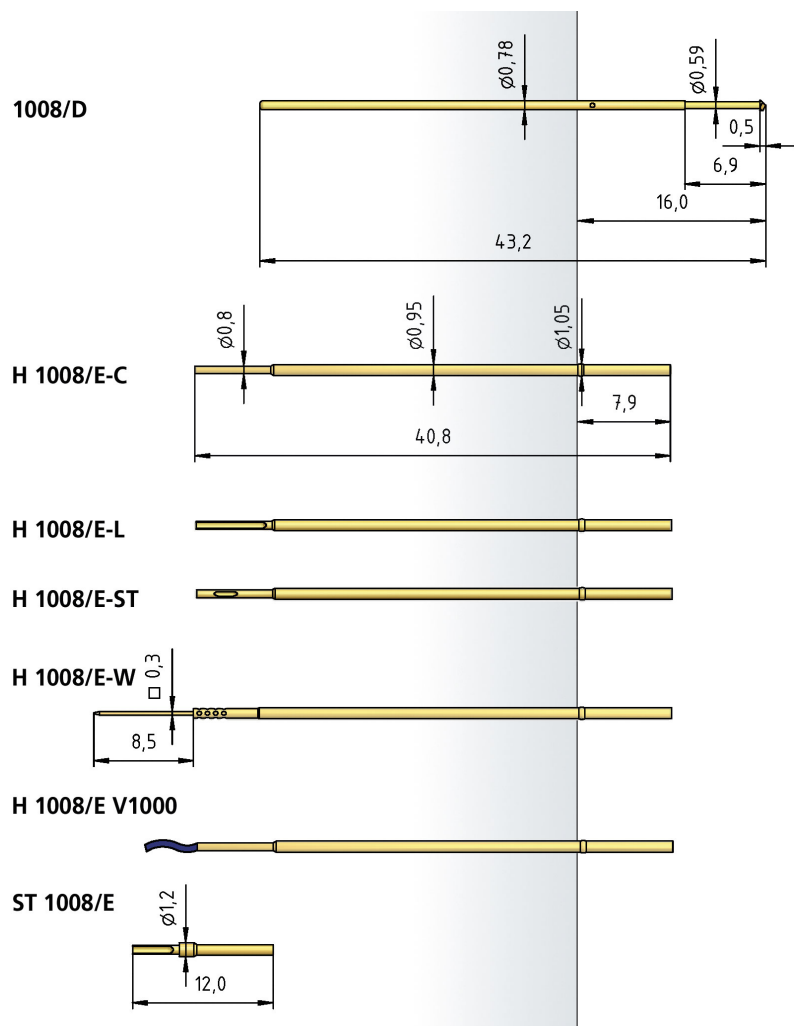

How to Order

1008/D - HD - 1.5 N - Au - 0.9

1 2 3 4 5

1. Series 2. Tip Style 3. Spring Force
4. Tip Plating 5. Tip Diameter