




AKZ1110/..-5.08-GREEN



Technical Data

Wire sizes		Insulating Material	
Solid min	0.2 mm ²	Material	PA 6.6
Solid max	4.0 mm ²	Flammability Class	UL 94 V-0
Stranded (flexible) min	0.2mm ²	Temperatures	
Stranded (flexible) max	2.5 mm ²	Operating Temperature (without mech. load)	-40 °C - 105 °C
Stranded with Ferrule min	0.25 mm ²	Store Temperature	-40 °C - 105 °C
Stranded with Ferrule max	2.5 mm ²	Wave Soldering Process	
Dimensions		Soldering Temperature, recommended	-
Stripped Length	7.0 mm	Peak Soldering Time, recommended	-
Materials		Reflow Process	
Clamp	Brass	Soldering Temperature, recommended	-
Screw	Steel	Peak Soldering Time, recommended	-
Contact Spring	Bronze		

Colours

	GREEN, RAL 6018
	LIGHT GREY, RAL 7035
	LIGHT GREEN, similar RAL 6018


Colours according to RAL, there may be variations on colour due to production conditions. Special colours on request.

Counterparts (Spacing 5.08 mm)

Pin Strip/Terminal Block

STLZ950	STLZ950-HT	STLZ950-G-HT	STLZ970	STLZ990	AKZ950	AKZS950
---------	------------	--------------	---------	---------	--------	---------



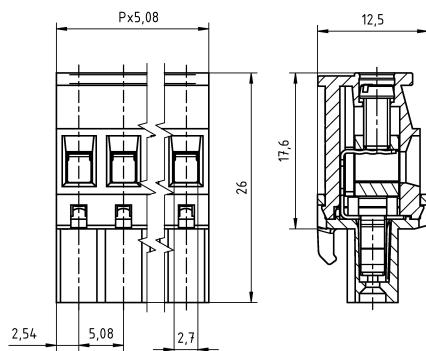



In combination of connectors with different admission data, the lower value is valid.



Order Data (Spacing 5.08 mm)

Poles	Width (mm)	Article Designation	Article Number	PU
2	10.16	AKZ1110/2-5.08-GREEN	51110020001 F	200
3	15.24	AKZ1110/3-5.08-GREEN	51110030001 F	200
4	20.32	AKZ1110/4-5.08-GREEN	51110040001 E	100
5	25.40	AKZ1110/5-5.08-GREEN	51110050001 E	100
6	30.48	AKZ1110/6-5.08-GREEN	51110060001 E	100
7	35.56	AKZ1110/7-5.08-GREEN	51110070001 E	100
8	40.64	AKZ1110/8-5.08-GREEN	51110080001 D	50
9	45.72	AKZ1110/9-5.08-GREEN	51110090001 D	50
10	50.80	AKZ1110/10-5.08-GREEN	51110100001 D	50
11	55.88	AKZ1110/11-5.08-GREEN	51110110001 D	50
...
18	91.44	AKZ1110/18-5.08-GREEN	51110180001 D	50
19	96.52	AKZ1110/19-5.08-GREEN	51110190001 D	50
20	101.60	AKZ1110/20-5.08-GREEN	51110200001 D	50

Accessoires

Figure	Designation	Article Number
	Series AK(Z)1110 with pull relief	Order Data: on request
	Bridge, 2-pole, insulated, BRI/2-5.0/5.08-LIGHT GREY	Order Data: 50000000006
	Bridge, 3-pole, insulated, BRI/3-5.0/5.08-LIGHT GREY	Order Data: 50000000007
	Coding Star CS1-5.0/5.08-RED	Order Data: 50000000021
	Bridge, 2-pole, BR/2-5.0/5.08-L7.0	Order Data: 50000000008
	Series AK(Z)1110 with separating element	Order Data: on request

Ratings

UseGroup	cRU [®] US			VDE	
	B	C	D		
Rated Voltage	300 V	150 V	300 V	250 V	
Rated Current	15 A	15 A	10 A	10 A	
Overtoltage Category				III	
Rated Wire Size				min	max
- solid	AWG 22-10	AWG 22-10	AWG 22-10	0.5 mm ² (6 A)	2.5 mm ² (10 A)
- stranded	AWG 22-10	AWG 22-10	AWG 22-10	0.5 mm ² (6 A)	2.5 mm ² (10 A)
Torque	0.50 Nm	0.50 Nm	0.50 Nm	0.50 Nm	
Screw Size	M3	M3	M3	M3	
Test Voltage	1.60 kV	1.30 kV	1.60 kV	4.0 kV	
Pollution Degree				3	