

## Series 1025/D

- Use in cases of bad soiling, oxydation or flux residues
- Penetration of these platings by rotating movement

### Mechanical Data

Center	2.54 mm/100 mil
Temperature Range	-30 °C - +120 °C
Full Travel	6.40 mm
Working Travel	4.30 mm
Pre-loaded Spring Force	0.60 N
Spring Force at Working Travel	2.00 N

### Electrical Data

Max. Current Rating	5.0...8.0 A
Typical Continuity Resistance	<= 20 mOhm


### Materials

Barrel	Bronze, gold-plated
Spring	Spring Steel, gold-plated
Plunger	Steel, gold-plated
Receptacle	Bronze, gold-plated

### Recommended Diameter of Drill

HP 2361.1 (Trolitax)	1.65 mm
with pressed-in Ring	1.75 mm
HGW 2372	1.67 mm
with pressed-in Ring	1.76 mm


### Tip style - Diameter - Plating



KD

1.50 Au

1025/D

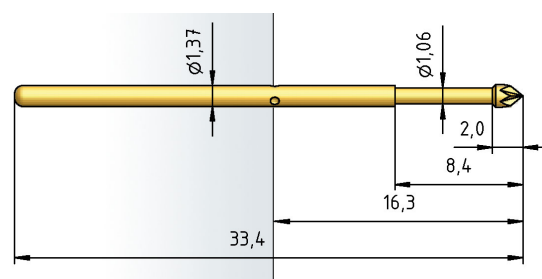

### How to Order

1025/D - KD - 2.0 N - Au - 1.5

1 2 3 4 5

1. Series 2. Tip Style 3. Spring Force  
4. Tip Plating 5. Tip Diameter

# Receptacles 1025/D

