

AK3750/..-10.0-GREEN



A Phoenix Mecano Brand

- 2 to n poles


Technical Data

Wire sizes		Insulating Material	
Solid min	0.08 mm ²	Material	PA 6.6
Solid max	2.5 mm ²	Flammability Class	UL 94 V-0
Stranded (flexible) min	0.14mm ²	Temperatures	
Stranded (flexible) max	2.5 mm ²	Operating Temperature (without mech. load)	-40 °C - 105 °C
Stranded with Ferrule min	0.14 mm ²	Store Temperature	-40 °C - 105 °C
Stranded with Ferrule max	1.5 mm ²	Wave Soldering Process	
Dimensions		Soldering Temperature, recommended	260 °C
Stripped Length	6.0 mm	Peak Soldering Time, recommended	3-4 s
PCB Hole Diameter	1.3 mm	Reflow Process	
Materials		Soldering Temperature, recommended	-
Solder Tab	Copper Alloy	Peak Soldering Time, recommended	-
Tension Spring	Stainless Steel		

Colours

	TRAFFIC GREY, RAL 7042
	GREEN, RAL 6018
	LIGHT GREEN, similar RAL 6018

Colours according to RAL, there may be variations on colour due to production conditions. Special colours on request.

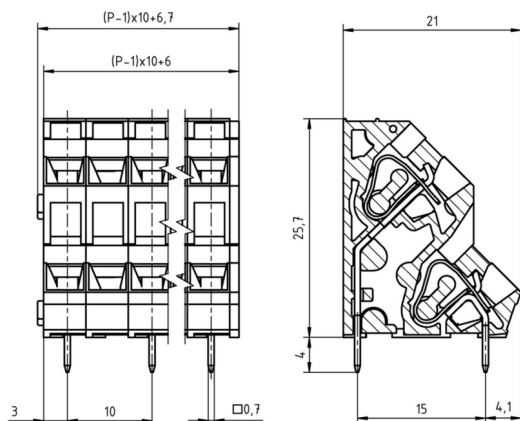

Order Data (Spacing 10.0 mm)

Poles	Width (mm)	Article Designation	Article Number	PU
2	16.70	AK3750/2-10.0-GREEN	53750020204 E	100
3	26.70	AK3750/3-10.0-GREEN	53750030204 E	100
4	36.70	AK3750/4-10.0-GREEN	53750040204 D	50
5	46.70	AK3750/5-10.0-GREEN	53750050204 D	50
6	56.70	AK3750/6-10.0-GREEN	53750060204 D	50
7	66.70	AK3750/7-10.0-GREEN	53750070204 D	50
8	76.70	AK3750/8-10.0-GREEN	53750080204 D	50
9	86.70	AK3750/9-10.0-GREEN	53750090204 D	50
10	96.70	AK3750/10-10.0-GREEN	53750100204 D	50
11	106.70	AK3750/11-10.0-GREEN	53750110204 D	50
12	116.70	AK3750/12-10.0-GREEN	53750120204 D	50

Ratings

UseGroup	B	C	D		
Rated Voltage	300 V	-	300 V	1000 V	
Rated Current	16 A	-	-	12 A	
Rated Wire Size				min	max
- solid	AWG 28-14	-	AWG 28-14	0.5 mm ²	2.5 mm ²
- stranded	AWG 28-14	-	AWG 28-14	0.5 mm ²	2.5 mm ²
Test Voltage	1.60 kV	-	1.60 kV	3.5 kV	



* Data similar to UL 1059 (XCFR2.E101811) und CSA 22.2 No. 158 (XCFR8.E101811)