



Technical Data // Series 5303/T01

Battery Probe 100 mil / 2.54 mm

HIGHLIGHTS

THT Variant

Short, compact size

Board-to-board contacting

Tape on Reel

MECHANICAL DATA

Center 2.54 mm/100 mil

Temperature Range -30 °C - +120 °C

Full Travel 1.40 mm

Working Travel 0.70 mm

Pre-loaded Spring Force 0.25 N

Spring Force at Working Travel 0.85 N

ELEKTRISCHE WERTE ELECTRICAL DATA

Max. Current Rating 3.5 A

Typical Continuity Resistance ≤ 20 mOhm

MATERIALS

Barrel Brass, gold-plated

Spring Spring Steel, gold-plated

Plunger Brass, gold-plated



Technical Data // Series 5303/T01

Battery Probe 100 mil / 2.54 mm


TIP STYLE - DIAMETER - PLATING



D

1.07M Au

5303/T01

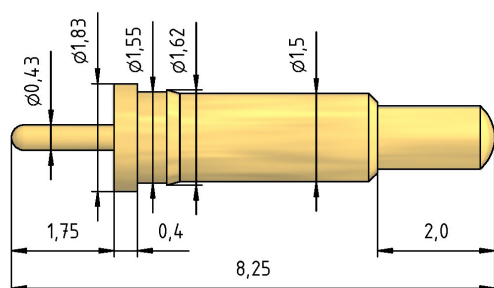

HOW TO ORDER

5303/ T01 - D - 0.85 N - Au - 1.07 M

1 2 3 4 5 6 7

- 1. Series 2. Variant 3. Tip Style
- 4. Spring Force 5. Tip Plating 6. Tip Diameter
- 7. Tip Material (only for Brass)