

Series 1006

- Test probe for 40 mil centers
- Short travel
- Low contact force

Mechanical Data	
Center	1.02 mm/40 mil
Temperature Range	-30 °C - +120 °C
Full Travel	2.29 mm
Working Travel	1.27 mm
Pre-loaded Spring Force	0.17 N
Spring Force at Working Travel	0.37 N

Electrical Data	
Max. Current Rating	3.0 A
Typical Continuity Resistance	<= 55 mOhm

Materials	
Barrel	Bronze, gold-plated
Spring	Bronze, Stainless Steel, gold-plated
Plunger	CuBe, gold-plated
Receptacle	Bronze, gold-plated


Recommended Diameter of Drill	
HP 2361.1 (Trolitax)	0.71 mm
HGW 2372	0.75 mm

High-Temperature Applications	
Temperature Range	-40 °C - +250 °C
Pre-Loaded Spring Force	0.15 N
Spring Force at Working Travel (Order Index E)	0.45 N

Tip style - Diameter - Plating



B	D	G
0.53C Au	0.53C Au	0.53C Au

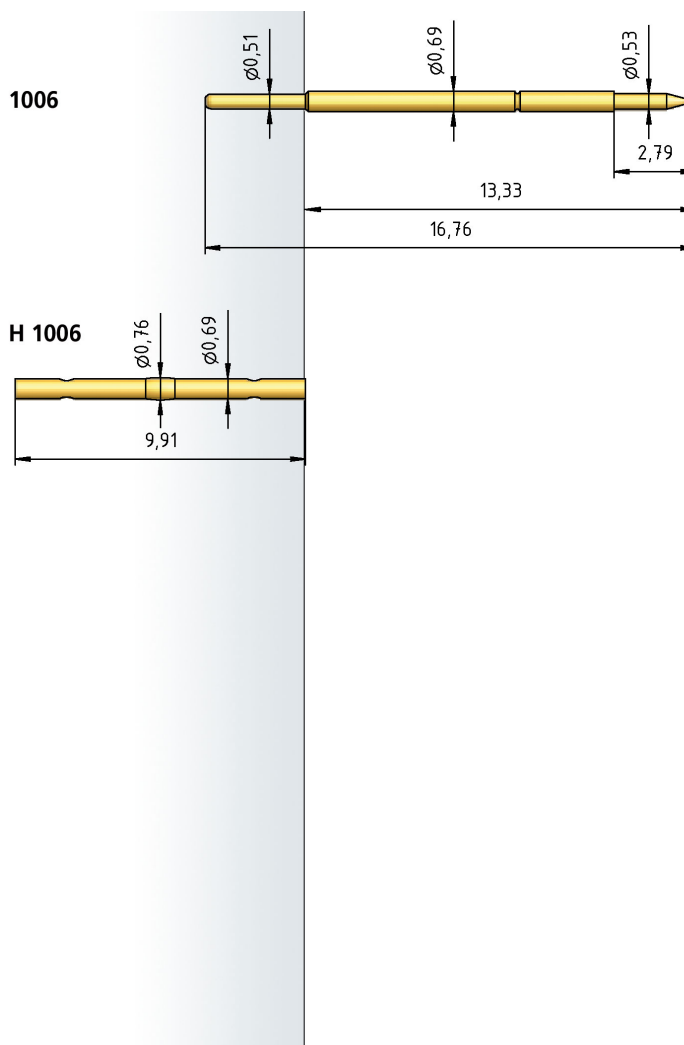

How to Order

1006 - B - 0.45 N E - Au - 0.53 C

1 2 3 4 5 6 7

- Series
- Tip Style
- Spring Force
- High Temperature
- Tip Plating
- Tip Diameter
- Tip Material (only for CuBe)