

Series 5310/G

- Test probe for cable harness testing
- Screwable - threaded design - against the creeping out of the Test Probe out of the receptacle
- Compact design

Mechanical Data	
Center	2.54 mm/100 mil
Temperature Range	-30 °C - +120 °C
Full Travel	4.50 mm
Working Travel	3.50 mm
Pre-loaded Spring Force	0.30 N
Spring Force at Working Travel	1.50 N


Electrical Data	
Max. Current Rating	5.0...8.0 A
Typical Continuity Resistance	<= 20 mOhm

Materials	
Barrel	Brass, gold plated
Spring	Spring Steel, gold plated
Plunger	Steel, CuBe
Receptacle	Brass, gold plated

Recommended Diameter of Drill	
HP 2361.1 (Trolitax)	2.00 mm
HGW 2372	2.03 mm

Available Screw Tools	
Article Designation	max. Tip Diameter
WFS 1021/G-2.54-1.8	1.8
WFS 1021/G-2.54-2.0	2.0


Tip style - Diameter - Plating



A	B	C	D1	H
2.00C Au	1.00 Au	2.00C Au	0.80 Au	1.00 Au

5310/G

H 5310/GR-L

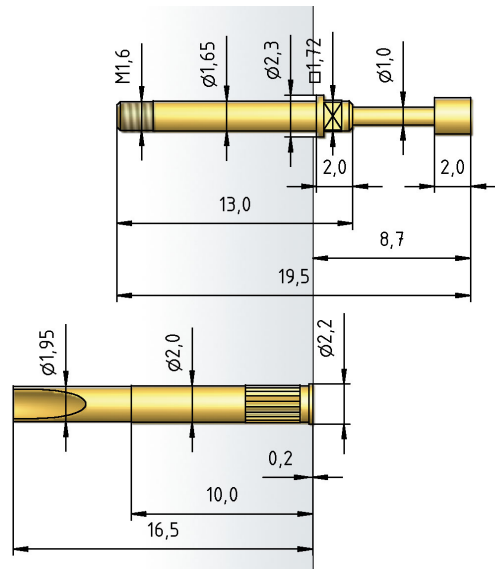

How to Order

5310/ G - A - 1.5 N - Au - 2.0 C

1 2 3 4 5 6 7

1. Series 2. Threaded Design 3. Tip Style
4. Spring Force 5. Tip Plating 6. Tip Diameter
7. Tip Material (only for CuBe)