

# AK2200/..-7.5-H-GREEN

- 2 to n poles



A Phoenix Mecano Brand


## Technical Data

Wire sizes		Insulating Material	
Solid min	0.2 mm <sup>2</sup>	Material	PA 6.6
Solid max	4.0 mm <sup>2</sup>	Flammability Class	UL 94 V-0
Stranded (flexible) min	0.2mm <sup>2</sup>	<b>Temperatures</b>	
Stranded (flexible) max	2.5 mm <sup>2</sup>	Operating Temperature (without mech. load)	-40 °C - 105 °C
Stranded with Ferrule min	0.25 mm <sup>2</sup>	Store Temperature	-40 °C - 105 °C
Stranded with Ferrule max	2.5 mm <sup>2</sup>	<b>Wave Soldering Process</b>	
<b>Dimensions</b>		Soldering Temperature, recommended	260 °C
Stripped Length	9.0 mm	Peak Soldering Time, recommended	3-4 s
PCB Hole Diameter	1.3 mm	<b>Reflow Process</b>	
<b>Materials</b>		Soldering Temperature, recommended	-
Screw	Steel	Peak Soldering Time, recommended	-
Solder Tab	Copper Alloy		
Clamp Cage	Steel		
Excenter	Steel		

## Colours

- GREEN, RAL 6018
- BLACK, RAL 9011
- LIGHT GREEN, similar RAL 6018


Colours according to RAL, there may be variations on colour due to production conditions. Special colours on request.

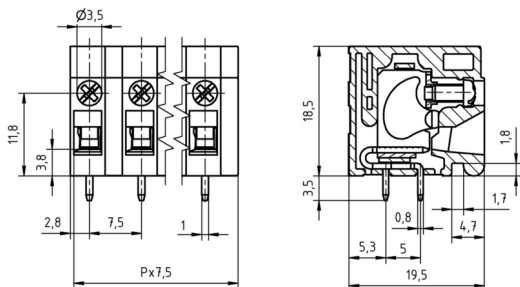

## Order Data (Spacing 7.5 mm)

Poles	Width (mm)	Article Designation	Article Number	PU
2	15.00	AK2200/2-7.5-H-GREEN	52200020071 D	50
3	22.50	AK2200/3-7.5-H-GREEN	52200030071 D	50
4	30.00	AK2200/4-7.5-H-GREEN	52200040071 D	50
5	37.50	AK2200/5-7.5-H-GREEN	52200050071 D	50
6	45.00	AK2200/6-7.5-H-GREEN	52200060071 D	50
7	52.50	AK2200/7-7.5-H-GREEN	52200070071 D	50
8	60.00	AK2200/8-7.5-H-GREEN	52200080071 D	50
9	67.50	AK2200/9-7.5-H-GREEN	52200090071 D	50
10	75.00	AK2200/10-7.5-H-GREEN	52200100071 D	50
11	82.50	AK2200/11-7.5-H-GREEN	52200110071 D	50
12	90.00	AK2200/12-7.5-H-GREEN	52200120071 D	50

## Accessoires

Figure	Designation	Article Number
	Spacer SPC-AK2200-GREEN	Order Data: 52200000002

## Ratings

UseGroup	C <sup>RU</sup> US			VDE	
	B	C	D		
Rated Voltage	300 V	150 V	300 V	450 V	
Rated Current	20 A	20 A	10 A	24 A	
Rated Wire Size				min	max
	- solid	AWG 30-12	AWG 30-12	AWG 30-12	0.5 mm <sup>2</sup> 2.5 mm <sup>2</sup>
	- stranded	AWG 30-12	AWG 30-12	AWG 30-12	0.5 mm <sup>2</sup> 2.5 mm <sup>2</sup>
Torque	0.50 - 0.60 Nm	0.50 - 0.60 Nm	0.50 - 0.60 Nm	0.50 Nm	
Screw Size	M2.5	M2.5	M2.5	M2.5	
Test Voltage	1.60 kV	1.30 kV	1.60 kV	2.5 kV	